

INDASH by PANAVISE®

751051707

Page 1 of 1

MOUNTING LOCATION:

Rt or Lft of Radio Cavity KRL

TOOLS REQUIRED:

Flat Dash Tool, Hook Tool

Phillips Screwdriver, T-25 Torx

PARTS INCLUDED:

(1)S7-1978 Mount

(3)A-#8x9/16"Needle Pt. Screw

CELL PHONE & MEDIA MOUNT

INSTALLATION INSTRUCTIONS

PART#: **751051707**

MFG: **DODGE, MERCEDES,
FREIGHTLINER**

MODELS & YEARS:

DODGE: Sprinter 2007-11

FREIGHTLINER: Sprinter 2007-18

MERCEDES: Sprinter 2007-18

STEP #1: With Dash tool, remove bezel around radio and climate control, and includes emergency lights and switches by inserting dash tool into top Right or Left of bezel and pry to release (1) clip. Repeat on the other side. continue to release all (7) clips. Set bezel down.

STEP #2: *If Radio is a Double Din skip to Step #3. If Radio is a Single Din continue.* With hands pull on the lower cubby to release (1) plastic clip each side. Set cubby aside.

STEP #3: With T-25 Torx driver remove (4) radio screws. Pull out radio and set down out of the way. Place the InDash by PanaVise Mount on the Right or Left side of radio cavity on flat spot. Install (2 or 3 depending on mounting location) of the screws to hold mount in place.

STEP #4: Replace the radio and bezel in reverse order.

INSTALLATION IS NOW COMPLETE. ENJOY YOUR NEW INDASH by PANAVISE MOUNT.



Radio Bezel Removed




Cubby Removed



Left Side Mounting Location



Right Side Mounting Location

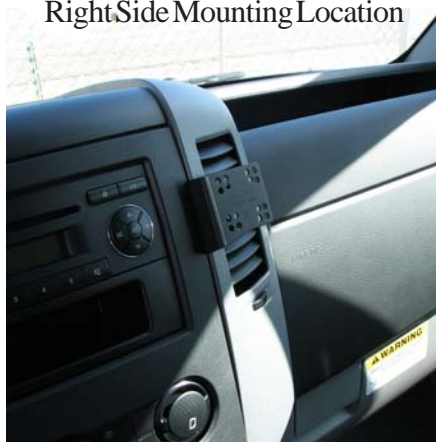

InDash Installed Showing Left and Right Locations



Double Din Radio Mount
Installed



05-17-18

There may be recent updates to this Instruction Sheet, please visit our website or contact PanaVise Products, Inc. for the latest revision as well as for the most complete up-to-date PanaVise *InDash Applications List*: 7540 Colbert Dr., Reno, NV, Phone: 800.759.7535, 775.850.2900, Fax: 800.395.8002, www.panavise.com. © 2018 PanaVise Products, Inc.