

INDASH by PANAVISE®

751311407

Page 1 of 6

MOUNTING LOCATION:

Right side of radio J RL

TOOLS REQUIRED:

Dash Tool, Hook tool

PARTS INCLUDED:

(1)S7-1940&(1)S7-1932(75001)

Top with (2) 8-32 Acorn Nuts

CELL PHONE & MEDIA MOUNT

INSTALLATION INSTRUCTIONS

PART#: 751311407

MFG: NISSAN/CHEVY

MODELS & YEARS:

Versa 07-12 (Pg#1)(W/O Nav)

Versa 13-14 (Page#5)

Maxima 07-08 (Pg#2)(W/O Nav)

Juke 11-14 (Pg#3)

Rogue 12-13 (Pg#4)

NISSAN- NV200 14-17 (Pg#6)

CHEVY-CityExpress 15-17 (Pg#6)

** ADVISEMENT **

Read instructions completely prior to starting installation. All InDash Mounts are designed so that after installation, phone is facing normal driver position for left-hand drive vehicles. This mount is not designed to be used in foreign countries with right-hand drive vehicles. Use extreme care when working around the plastic components on the dash. Excess force, can cause breakage of the plastic components

Versa 2007-2012

STEP #1: Begin by removing the top cover above the radio. Starting at the front of the cover. Insert the hook tool in the front of the cover and pulling toward you with your hands at the same time to release (4) clips. It will pop off all at once. Lift up the top to remove the (2) exposed screws at the top of the radio.

STEP #2: With your hands an hook tool assist, pull off the air vents/cubby /radio bezel, releasing (6) clips

STEP #3: Remove the (4) radio/display screws with the Phillips screwdriver. Pull out the radio/display assembly enough to get at the (2) T-20 Torx screws on the right side of the radio. Place the InDash by PanaVise Mount bottom piece onto the right side of the radio with the joggle aligned up with the radio and reinstall the (2) screws.

STEP #4: Carefully replace the radio and radio bezel. To replace the bezel start by inserting the top (2) clips into place. Continue to snap the clips into place. A slight adjustment of the mount may assist to reinstall the radio/display bezel. Reconnect the air bag light plug. Replace the console and shifter bezels in reverse order.

INSTALLATION IS NOW COMPLETE. ENJOY YOUR NEW INDASH by PANAVISE MOUNT



Removal of Top Cover & Screws



Bezel Removed



Prototype Mounted on Radio



InDash installed showing location



Bottom Part in Place



01-16-18

INDASH by PANAVISE®

751311407

Page 2 of 6

MOUNTING LOCATION:

Right side of radio J R

TOOLS REQUIRED:

Dash Tool, Hook tool

PARTS INCLUDED:

(1)S7-1940&(1)S7-1932(75001)

Top with (2) 8-32 Acorn Nuts

CELL PHONE & MEDIA MOUNT

INSTALLATION INSTRUCTIONS

PART#: 751311407

MFG: NISSAN/CHEVY

MODELS & YEARS:

Versa 07-12 (Pg#1)(W/O Nav)

Versa 13-14 (Page#5)

Maxima 07-08 (Pg#2)(W/O Nav)

Juke 11-14 (Pg#3)

Rogue 12-13 (Pg#4)

NISSAN- NV200 14-16 (Pg#6)

CHEVY-CityExpress 15-17 (Pg#6)

MAXIMA:

STEP #1: Remove the shifter knob by pulling down on the collar to release. Remove the clip that holds the shift knob in place with a hook tool. Remove shift knob and set aside.

STEP #2: Remove the shifter ID cover by lifting up on a corner to release a total of (4) clips. Disconnect the light plug. Set cover aside.

STEP #3: Remove the climate control and shifter bezel, with the cubby and power outlet attached. Pull up on the back to release (2) clips, and continue to release (2) more clips. Pull out the bezel to release another (2) clips, releasing the top of the climate control from the dash. Locate (2) screws that are angled out below the left and right of the passenger air bag indicator. Remove these (2) screws.

STEP #4: Remove the bezel that goes around the radio and includes the air vents, by inserting the hook tool in between the dash and the bezel to the right side where the soft dash meets the trim. Pull to release (1 or 2) clips. Repeat on the left side. Begin to pull up and out on the bezel to release (2) clips on each outside of the air vents. Tilt up the bezel and pull it out while releasing the (2) plastic clips at the top of the bezel. Unplug air bag light and pull bezel all the way off and set aside.

STEP #5: Remove the (4) radio/display screws with the Phillips screwdriver. Pull out the radio/display assembly enough to get at the (2) T-20 Torx screws on the right side of the radio. Place the InDash by PanaVise Mount bottom piece onto the right side of the radio with the joggle aligned up with the radio and reinstall the (2) screws.

STEP #6: Carefully replace the radio and radio bezel. To replace the bezel start by inserting the top (2) clips into place. Continue to snap the clips into place. A slight adjustment of the mount may assist to reinstall the radio/display bezel. Reconnect the air bag light plug. Replace the console and shifter bezels in reverse order.

STEP #7: Install the top piece of the mount (75001) onto the bottom piece with the (2) supplied cap nuts.

INSTALLATION IS NOW COMPLETE. ENJOY YOUR NEW INDASH by PANAVISE MOUNT.


**** ADVISEMENT ****
Read instructions completely prior to starting installation. All InDash Mounts are designed so that after installation, phone is facing normal driver position for left-hand drive vehicles. This mount is not designed to be used in foreign countries with right-hand drive vehicles. Use extreme care when working around the plastic components on the dash. Excess force, can cause breakage of the plastic components.



Console Bezel Removed



Radio Bezel Screw Removal

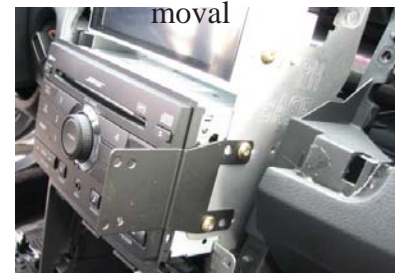

Bottom Piece Screws



InDash Final Installation



Bottom Piece Installed



01-16-18

INDASH by PANAVISE®

751311407

Page 3 of 6

MOUNTING LOCATION:

Right side of radio J R

TOOLS REQUIRED:

Dash Tool, Hook tool

PARTS INCLUDED:

(1)S7-1940&(1)S7-1932(75001)

Top with (2) 8-32 Acorn Nuts

CELL PHONE & MEDIA MOUNT

INSTALLATION INSTRUCTIONS

PART#: 751311407

MFG: NISSAN/CHEVY

MODELS & YEARS:

Versa 07-12 (Pg#1)(W/O Nav)

Versa 13-14 (Page#5)

Maxima 07-08 (Pg#2)(W/O Nav)

Juke 11-14 (Pg#3)

Rogue 12-13 (Pg#4)

NISSAN- NV200 14-16 (Pg#6)

CHEVY-CityExpress 15-17 (Pg#6)

** ADVISEMENT **

Read instructions completely prior to starting installation. All InDash Mounts are designed so that after installation, phone is facing normal driver position for left-hand drive vehicles. This mount is not designed to be used in foreign countries with right-hand drive vehicles. Use extreme care when working around the plastic components on the dash. Excess force, can cause breakage of the plastic components.

STEP #1: Manual Climate Control (knobs) Only: Remove the slider lever by lifting the square button up and off the slider arm.

STEP #2: Continuing with Manual Climate Control Version, remove the climate control bezel, by inserting dash tool into the side of the bezel and prying to release the (4) clips, carefully let it hang down.

STEP #2a: With Electronic Climate Control, the bezel includes the climate control completely. Start by inserting dash tool into the side of the bezel and prying to release the (4) clips, carefully let it hang down.

STEP #3: With either climate control version, remove the (2) lower air vent bezel assembly screws with the Phillips screwdriver. Pull out the air vent assembly that surrounds the radio releasing (4) clips at the top of the bezel. Disconnect plug(s) and set aside.

Step #4: Remove the (4) radio/display screws with the Phillips screwdriver. Pull out the radio/display assembly enough to get at and remove the (2) T-20 Torx screws on the front right side of the radio. Place the InDash by PanaVise Mount bottom piece onto the right side of the radio with the joggle aligned up with the radio ledge. Hold the washers between the InDash Mount and the radio, and install the (2) screws.

Step #5: Reinstall the bezel(s) and climate control / parts in reverse order. Install the top piece of the InDash mount onto the bottom piece using the (2) acorn nuts in the desired holes for optimum angle.

INSTALLATION IS NOW COMPLETE. ENJOY YOUR NEW INDASH by PANAVISE MOUNT



Man.Climate Control Bezel



4 Radio Screws Locations



Screws to Remove Vent Bezel



InDash Installed Showing Location-



InDash Bottom Installed on Radio- Juke washers hidden



Washer in Place Under Mount



01-16-18

There may be recent updates to this Instruction Sheet, please visit our website or contact PanaVise Products, Inc. for the latest revision as well as for the most complete up-to-date PanaVise InDash Applications List: 7540 Colbert Dr., Reno, NV, Phone: 800.759.7535, 775.850.2900, Fax: 800.395.8002, www.panavise.com. © 2017 PanaVise Products, Inc.

INDASH by PANAVISE®

751311407

Page 4 of 6

MOUNTING LOCATION:

Right side of radio J R

TOOLS REQUIRED:

Dash Tool, Hook tool

PARTS INCLUDED:

(1)S7-1940&(1)S7-1932(75001)

Top with (2) 8-32 Acorn Nuts

CELL PHONE & MEDIA MOUNT

INSTALLATION INSTRUCTIONS

PART#: 751311407

MFG: NISSAN/CHEVY

MODELS & YEARS:

Versa 07-12 (Pg#1)(W/O Nav)

Versa 13-14 (Page#5)

Maxima 07-08 (Pg#2)(W/O Nav)

Juke 11-14 (Pg#3)

Rogue 12-13 (Pg#4)

NISSAN- NV200 14-18 (Pg#6)

CHEVY-CityExpress 15-17 (Pg#6)

** ADVISEMENT **

Read instructions completely prior to starting installation. All InDash Mounts are designed so that after installation, phone is facing normal driver position for left-hand drive vehicles. This mount is not designed to be used in foreign countries with right-hand drive vehicles. Use extreme care when working around the plastic components on the dash. Excess force, can cause breakage of the plastic components.

Rogue 2012-2013

STEP #1: With Dash Tool remove the top of dash speaker cover starting at the front by the windshield. Safely move shifter into D. Then use dash tool to remove climate control bezel by inserting tool into side of bezel and pry out to release (4) clips. Set bezel aside. Remove (2) screws from under the radio.

STEP #2: With Phillips screwdriver remove the (4) screws that hold the speaker in place. Remove the speaker, disconnect the plug and set aside. Continue to release radio bezel working your way up to just beside the radio by releasing (4) clips. Grasp the bezel at the sides and pull out towards you to release (4) more clips. Lift out bezel enough to get at radio screws.

STEP #3: Remove the (4) radio screws and pull the radio out just enough to get at the T-20 Torx screws of the radio bracket. Remove the (2) radio bracket screws with Phillips screwdriver or T-20 Torx. Install bottom piece of InDash by PanaVise Mount over screw holes (and/or under the bracket) and reinstall the (2) screws. Replace the bezels and speaker starting at the bottom, tilting it into place.

STEP#4: Install the top part of InDash by PanaVise Mount with the (2) Acorn nuts.

INSTALLATION IS NOW COMPLETE, ENJOY YOUR NEW INDASH BY PANAVISE MOUNT!



Climate Control Removal (All)



Bottom Piece Installed (over)



InDash Installed Showing Location 2012-13
Rogue with 5" screen NAV

There may be recent updates to this Instruction Sheet, please visit our website or contact PanaVise Products, Inc. for the latest revision as well as for the most complete up-to-date PanaVise InDash Applications List: 7540 Colbert Dr., Reno, NV, Phone: 800.759.7535, 775.850.2900, Fax: 800.395.8002, www.panavise.com. © 2017 PanaVise Products, Inc.



06-09-17

INDASH by PANAVISE®

751311407

Page 5 of 6

MOUNTING LOCATION:

Right side of radio J R

TOOLS REQUIRED:

Dash Tool, Hook tool
T20 Torx Driver,
5/16" Socket Driver/Wrench

PARTS INCLUDED:

(1)S7-1940&(1)S7-1932(75001)

Top with (2) 8-32 Acorn Nuts

CELL PHONE & MEDIA MOUNT

INSTALLATION INSTRUCTIONS

PART#: 751311407

MFG: NISSAN/CHEVY

MODELS & YEARS:

Versa 07-12 (Pg#1)(W/O Nav)

Versa 13-14 (Page#5)

Maxima 07-08 (Pg#2)(W/O Nav)

Juke 11-14 (Pg#3)

Rogue 12-13 (Pg#4)

NISSAN- NV200 14-18Pg#6)

CHEVY-CityExpress 15-17 (Pg#6)

** ADVISEMENT **

Read instructions completely prior to starting installation. All InDash Mounts are designed so that after installation, phone is facing normal driver position for left-hand drive vehicles. This mount is not designed to be used in foreign countries with right-hand drive vehicles. Use extreme care when working around the plastic components on the dash. Excess force, can cause breakage of the plastic components.....

Versa 2013-2014

STEP #1: Begin by removing the radio bezel. Starting at the top of the front cover with Dash Tool. Insert the Dash Tool in the top corner of the bezel, then pulling toward you with your hands at the same time to release (8) clips. It will pop off top then bottom. Air vents may not pop out, or they may fall down as they are not set in place too well. Set bezel and air vents aside.

STEP #2: With T20 Torx Driver, remove the (2) right side screws that go into the radio.

STEP #3: Place Indash by PanaVise Mount over the (2) screw holes, aligning the joggle bend to sit onto the ledge of the radio. Replace the screws.

STEP #4: Install the air vents onto the radio bezel, and replace the air vents and bezel as one assembly.

STEP#5: Install the top piece of the InDash Mount (75001) with (2) Acorn Nuts and 5/16" socket driver.

INSTALLATION IS NOW COMPLETE. ENJOY YOUR NEW INDASH by PANAVISE MOUNT




Radio Bezel/Air Vents removal



Plugs to disconnect as needed



InDash Mount in place showing location

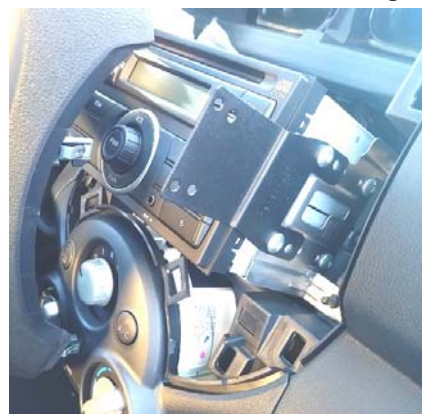

InDash Bottom Piece in place



06-09-17

INDASH by PANAVISE®

751311407

Page 6 of 6

MOUNTING LOCATION:

Right side of radio J R

TOOLS REQUIRED:

Dash Tool, Hook tool
T20 Torx Driver,
5/16"Socket Driver/Wrench

PARTS INCLUDED:

(1)S7-1940&(1)S7-1932(75001)

Top with (2) 8-32 Acorn Nuts

CELL PHONE & MEDIA MOUNT

INSTALLATION INSTRUCTIONS

PART#: 751311407

MFG: NISSAN/CHEVY

MODELS & YEARS:

Versa 07-12 (Pg#1)(W/O Nav)

Versa 13-14 (Page#5)

Maxima 07-08 (Pg#2)(W/O Nav)

Juke 11-14 (Pg#3)

Rogue 12-13 (Pg#4)

NISSAN- NV200 14-17 (Pg#6)

CHEVY-CityExpress 15-17 (Pg#6)

** ADVISEMENT **

Read instructions completely prior to starting installation. All InDash Mounts are designed so that after installation, phone is facing normal driver position for left-hand drive vehicles. This mount is not designed to be used in foreign countries with right-hand drive vehicles. Use extreme care when working around the plastic components on the dash. Excess force, can cause breakage of the plastic components -----.

Chevy City Express 15-17, Nissan NV200 2014-17

STEP #1: Begin by removing the air flow adjuster knob. Pull to snap off. Starting at the top of the front cover with Dash Tool. Insert the Dash Tool in the top side corner of the bezel, then pulling toward you with your hands at the same time to release (8) clips. It will pop off top then bottom. Set bezel and with air vents aside.

STEP #2: With T20 Torx Driver, remove the (2) right side screws that go into the radio.

STEP #3: Place Indash by PanaVise Mount over the (2) screw holes, aligning the joggle bend to sit onto the ledge of the radio. Replace the screws.

STEP #4: Replace the bezel with air vents assembly.

STEP#5: Install the top piece of the InDash Mount (75001) with (2) Acorn Nuts and 5/16" socket driver.

INSTALLATION IS NOW COMPLETE. ENJOY YOUR NEW INDASH by PANAVISE MOUNT



Main bezel removed



Bottom part of mount in place



InDash Mount in place showing location



01-16-18